Anwendung/Application :

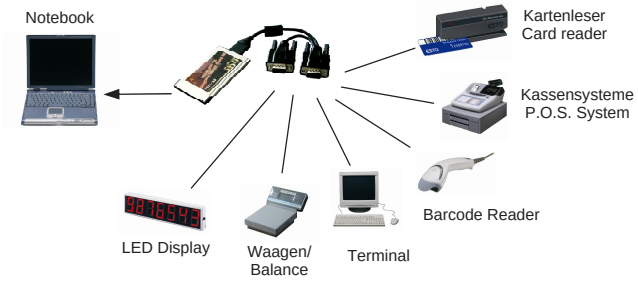

Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:

PCMCIA 2S Seriell RS-232 Karte 16/32-Bit

Beschreibung :	• Die EX-1352 stellt zwei Serielle RS-232 High Performance UART 16C950 Ausgänge zur Verfügung. Er ist entwickelt worden um zwei weitere Serielle Ports für Notebook über den 32-Bit PCMCIA Bus zu erweitern, um Serielle RS-232 Peripheriegeräte wie z.B. Modem, Kassendrucker usw. anzuschliessen.
Merkmale :	• Schnittstelle: RS-232 V.24 • FIFO Buffer: 16C950 mit 128Byte • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • Daten Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: none, even, odd, space, mark • Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	• Oxford OXCF950
Datentransfer-Rate :	• 50Baud bis 921.6KBaud
Anschlüsse :	• 2 x 9 Pin D-SUB Seriell Stecker
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 70^{0}C • 5 bis 90%
Hardwaresysteme :	• PCMCIA CardBus 16- und 32-Bit
Abmessung / Gewicht :	• 117 x 53mm / 150g
Lieferumfang :	• EX-1352, Kabel mit 2 x 9 Pin Anschlüsse, Treiber CD, Handbuch

PCMCIA 2S Serial RS-232 card, 16/32-Bit

Description:	• The PCMCIA I/O adapter provides 2 high performance 16C950-type UART compatible RS-232 serial ports. It is designed for Notebook to provide instant COM port expansion via the PCMCIA 16- or 32-Bit Bus to connect about serial RS-232 peripheral devices such Modem, P.O.S. System ect.
Feature :	• Interface: RS-232 V.24 • FIFO Buffer: 16C950 with128Byte • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • Data Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: None, even, odd, space, mark • Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	• Oxford OXCF950
Data transfer rate :	• 50Baud up to 921.6KBaud
Connectors :	• 2 x 9 pin D-SUB serial male connector
Operating Temperature : Operating Humidity :	• 0 to 70^{0}C • 5 to 90%
Hardware system :	• PCMCIA CardBus 16- and 32-Bit
Size / Weight :	• 117 x 53mm / 150g
Packaging contents :	• EX-1352, Cable with 2 x 9 pin connector, Driver CD, Manual